

# Topic 02: IEEE 802.15.4

Tuesday 20 Feb 2007

ICTP-ITU School on Wireless Networking for  
Scientific Applications in Developing Countries

Bhaskaran Raman  
Department of CSE, IIT Kanpur

<http://www.cse.iitk.ac.in/users/braman/>

# Outline

- What is 802.15.4 ? Other related technologies
- 802.15.4 PHY overview
- Device classes, network topologies
- 802.15.4 MAC
- MAC management:
  - Starting and maintaining PANs
  - Association
- Data exchange mechanisms

# Personal Area Networks (PAN)

- WLAN: IEEE 802.11
  - Ethernet matching speed
  - Range:  $O(100\text{m})$
- WPAN:
  - Low cost
  - Low power (battery should last several months)
  - Short range  $O(10\text{m})$
  - Small size

# IEEE 802.15 Series



802.15.3 (UWB)

High data rate  
Multimedia applications

802.15.1 (Bluetooth)


Medium rate  
Cell-phones, PDA  
QoS suited for voice

802.15.4 (LR-WPAN)

Low rate  
Industrial, residential,  
medical applications  
Low power  
Low cost

ZigBee works hand-in-hand with 802.15.4

# 802.15.4/ZigBee Architecture

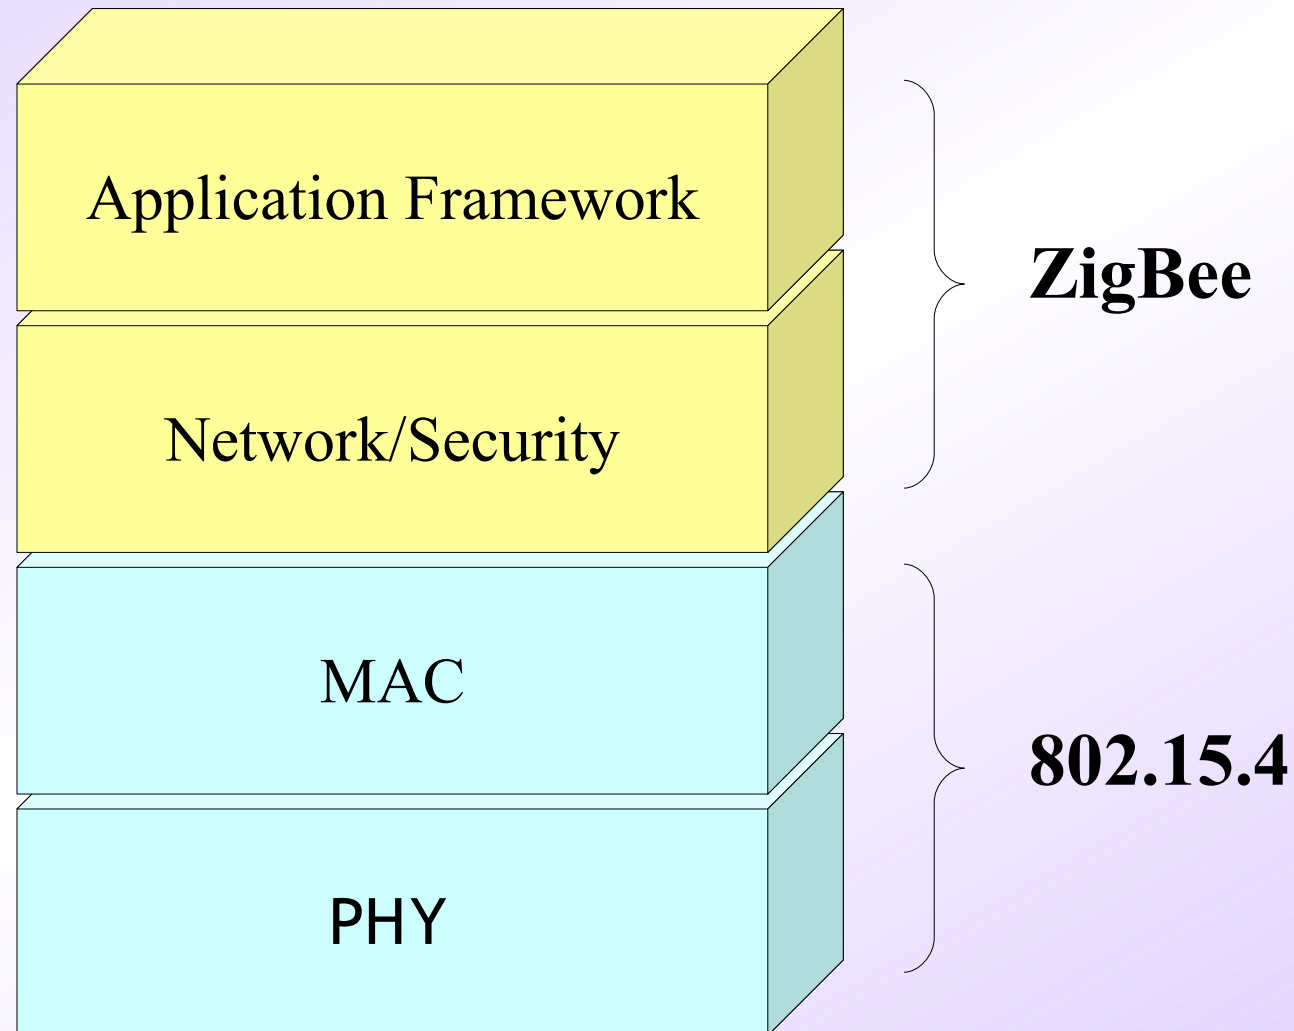

# 802.15.4 PHY

Table 1—Frequency bands and data rates

PHY (MHz)	Frequency band (MHz)	Spreading parameters		Data parameters		
		Chip rate (kchip/s)	Modulation	Bit rate (kb/s)	Symbol rate (ksymbol/s)	Symbols
868/915	868–868.6	300	BPSK	20	20	Binary
	902–928	600	BPSK	40	40	Binary
2450	2400–2483.5	2000	O-QPSK	250	62.5	16-ary Orthogonal

1 channel

10 channels

16 channels


Source: IEEE 802.15.4 specification

# 802.15.4 Device Classes



- Full Function Device (FFD)
  - Can act as PAN “coordinator”
  - Can talk to any other device
- Reduced Function Device (RFD)
  - Cannot be a “coordinator”
  - Can talk only to FFD
  - Very simple implementation

# Network Topologies

Star network

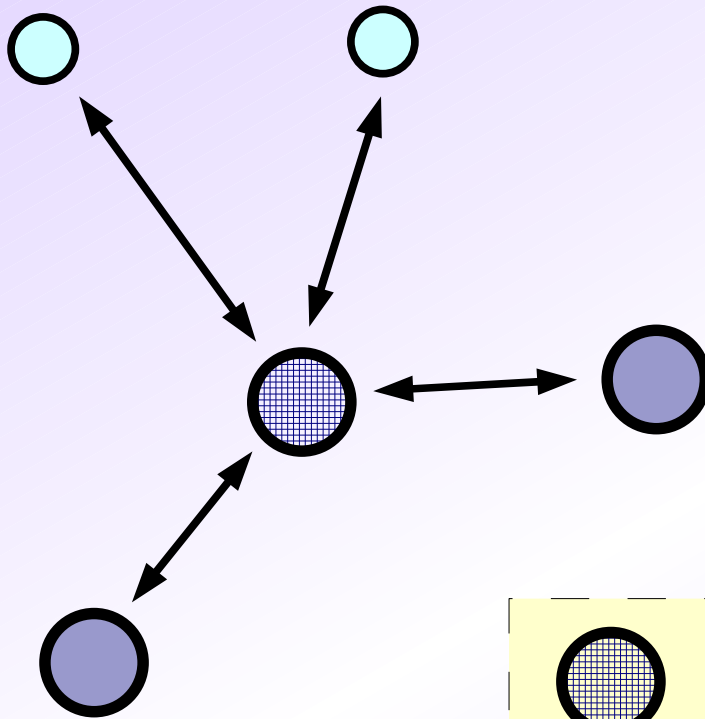

Peer-to-peer network

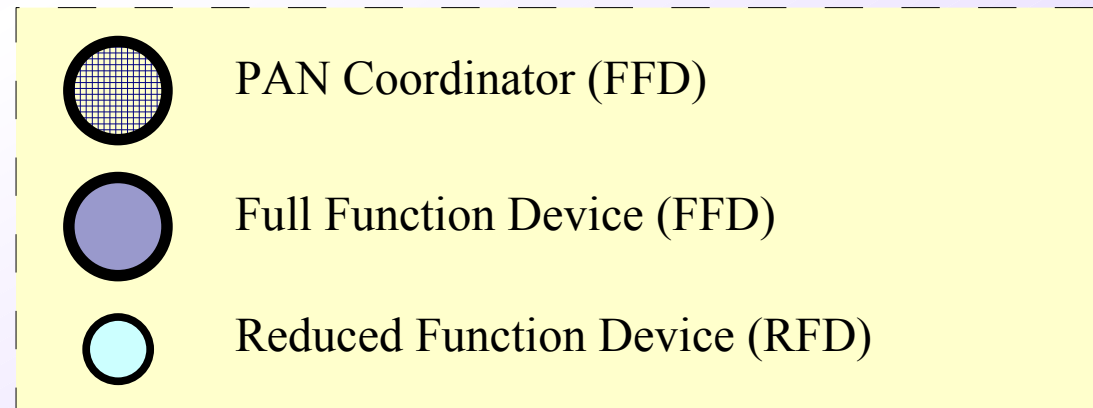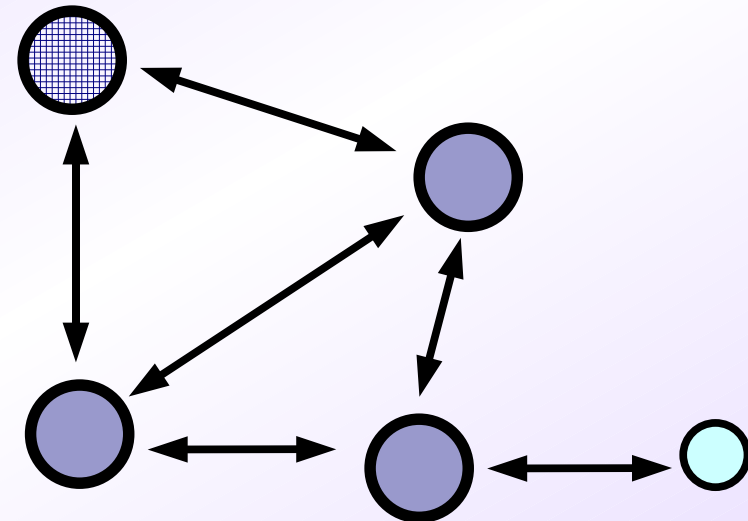



# Outline

- What is 802.15.4 ? Other related technologies
- 802.15.4 PHY overview
- Device classes, network topologies
- 802.15.4 MAC
- MAC management:
  - Starting and maintaining PANs
  - Association
- Data exchange mechanisms

# Optional Beacons

- A PAN can be **beacon-enabled** or **non-beacon-enabled**
  - Decided by the coordinator
  - Mechanism for power saving (if required)
- Beacon enabled  $\implies$  periodic beacons

# Superframe Structure

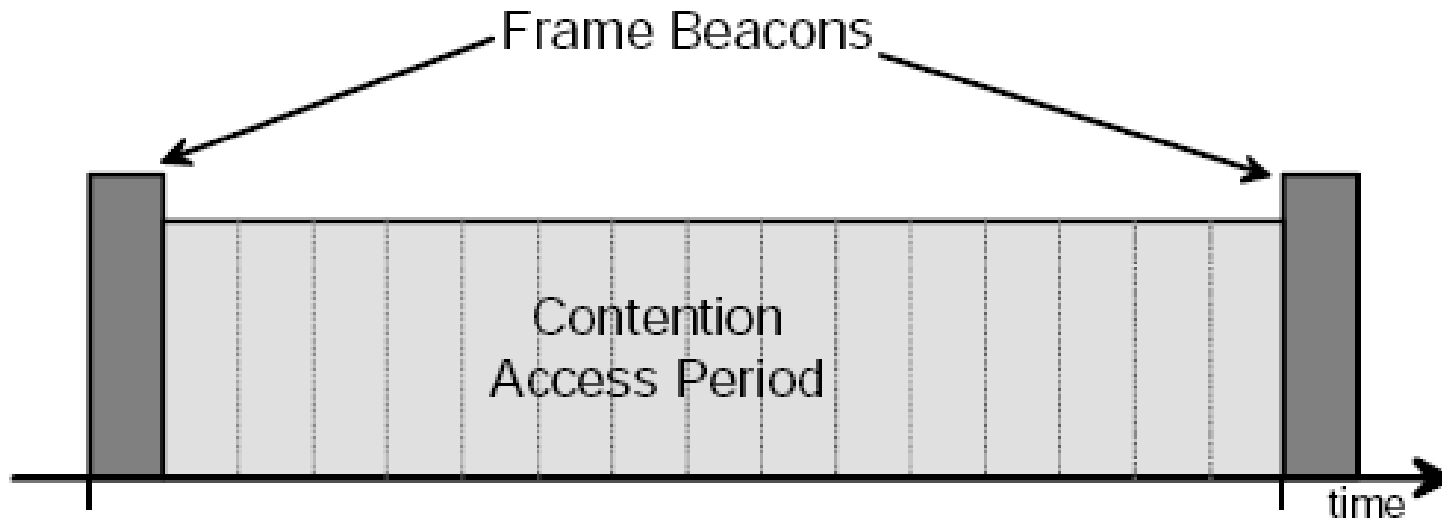


Figure 4—Superframe structure without GTSS


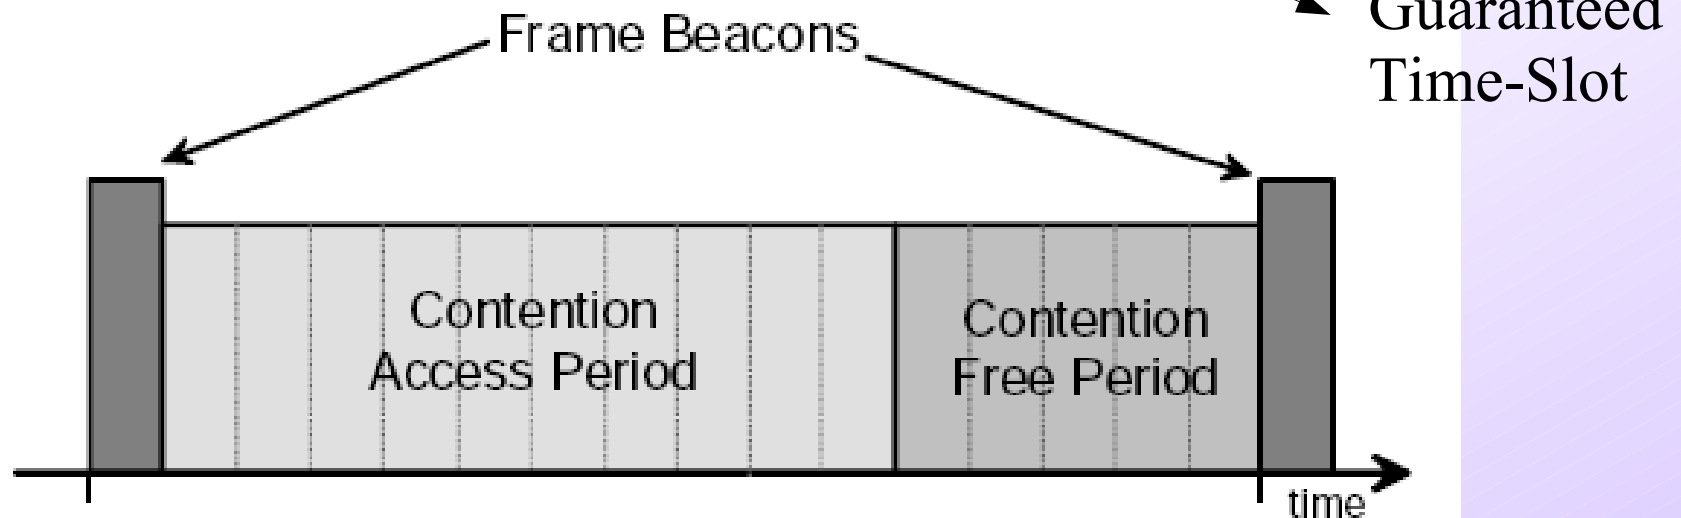


Figure 5—Superframe structure with GTSS

Source: IEEE 802.15.4 specification

# Superframe Structure (Continued)

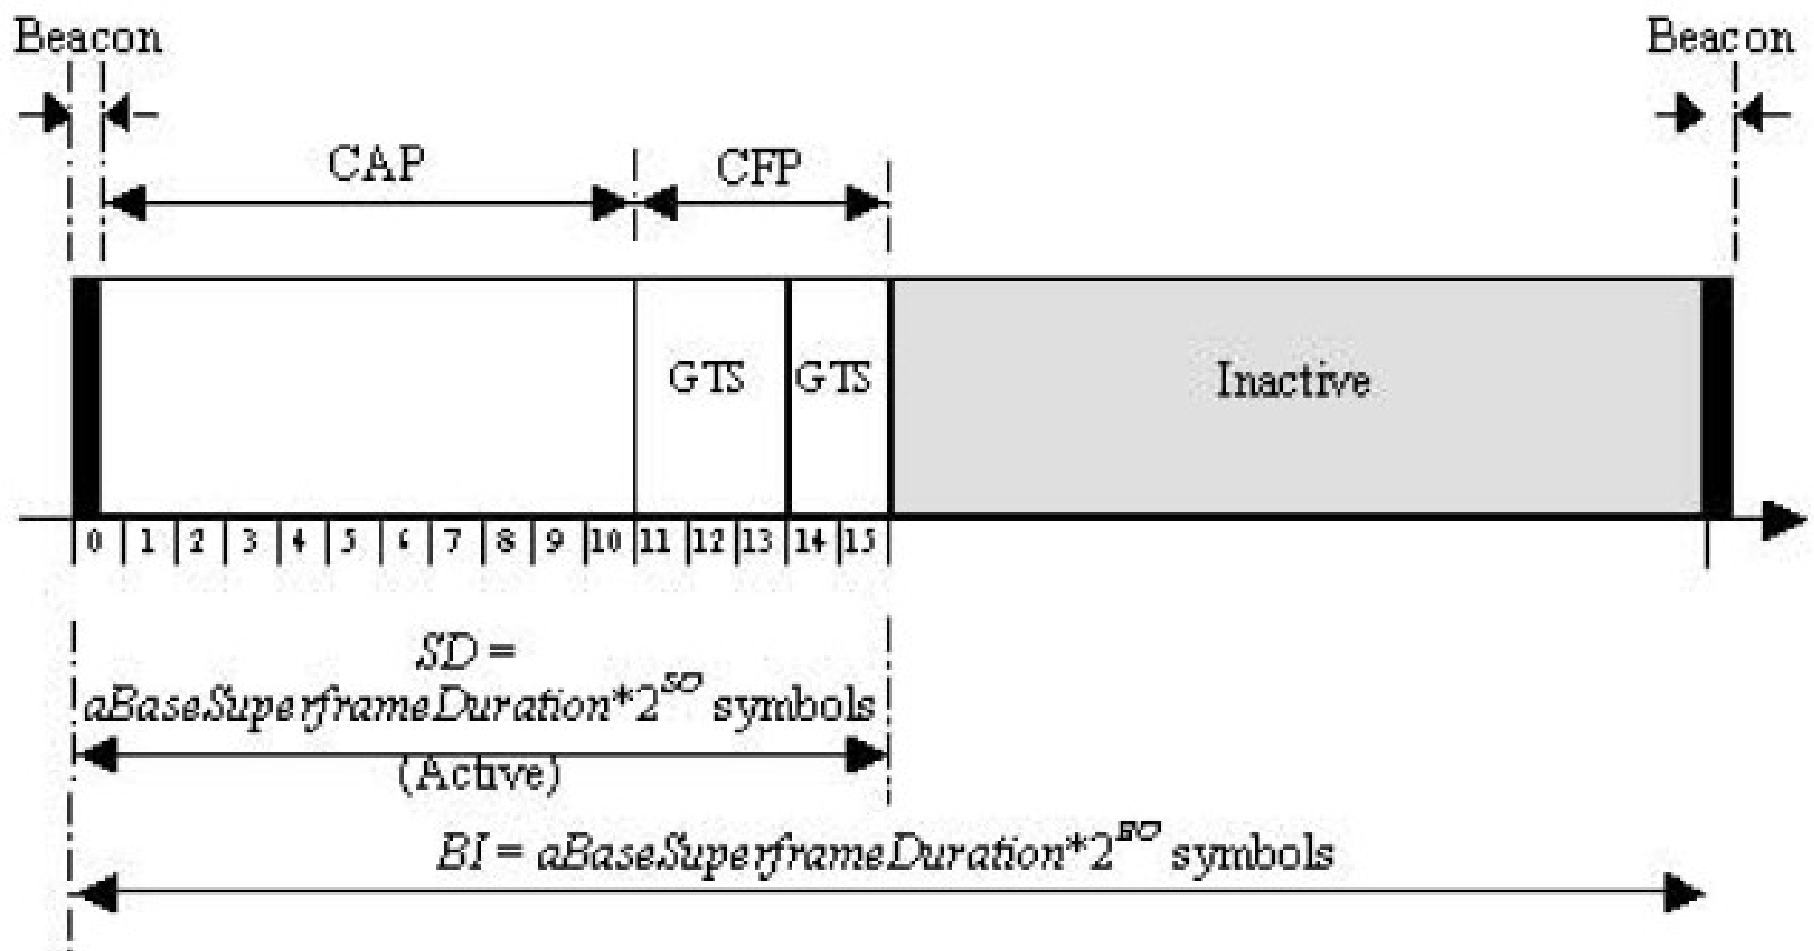

Beacon Interval (BI) can be a multiple of the Superframe Duration (SD)

**Figure 59—An example of the superframe structure**

Source: IEEE 802.15.4 specification

Bhaskaran Raman, Dept. of CSE, IIT Kanpur

# Superframe Structure: Remarks

- CAP, then CFP
- Superframe = **16 slots** (slot=60 symbols when SO=0)
- A minimum of 440 symbols for CAP
- Maximum of 7 GTS allocations
- A GTS may occupy more than one slot
- All GTS tx must end before start of beacon tx
- All tx in CAP must end before CFP (or beacon)
- **ACKs** are optional
  - Requirement specified in a data packet


# CSMA Algorithm

- Called **slotted CSMA** in beaconsed PANs
- **Unslotted CSMA** in non-beaconsed PANs
- But both use “units” of time (“slots” in 802.11 terminology)
  - **aUnitBackoffPeriod**: 20 symbols by default
- In beaconsed PANs, the first backoff is aligned with the start of the super frame

# CSMA: Variables Used

- **BE (Backoff Exponent)**: backoff delay is for  $\text{random}[0, 2^{\text{BE}})$  units of time
- **CW (Contention Window)**: the number of units to perform CCA (Clear Channel Assessment) after random backoff
  - **Warning**: do not confuse with 802.11 terminology
- **NB: Number of Backoffs** so far
  - Initialized to 0

# Slotted CSMA

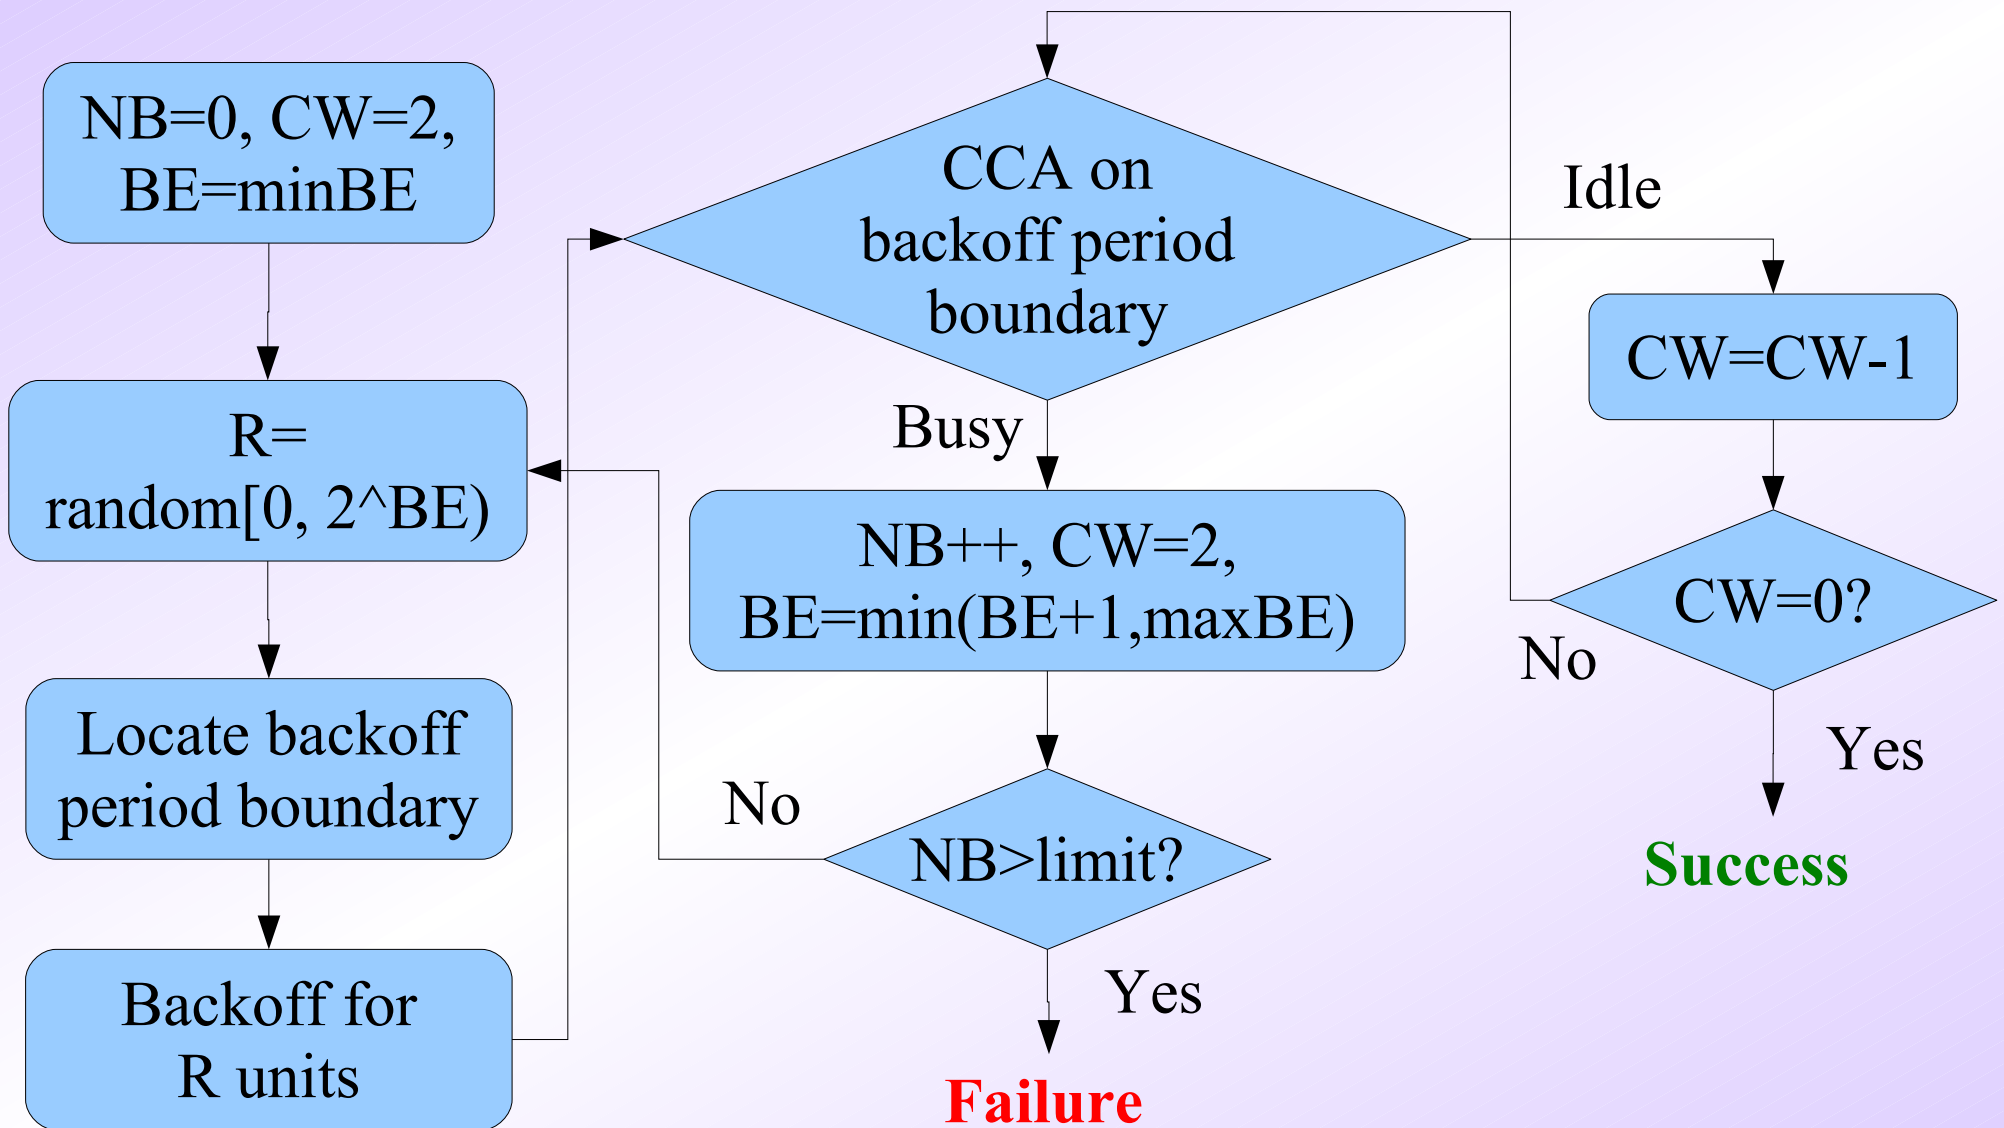


Default values:  $\text{minBE}=3$ ,  $\text{maxBE}=5$ ,  $\text{limit}=4$



# Differences from 802.11 CSMA

- Have to finish by a specific time
  - Otherwise continue random delay in next superframe
- 802.11 has per-delay-slot CCA
  - Why CCA for two units in 802.15.4?
- No limit on number of retries in 802.11
- During init:  $BE = \min(2, \min BE)$  possible
  - If device is battery constrained
  - Allows device to save power by prioritizing its tx

# Unslotted CSMA (Differences)

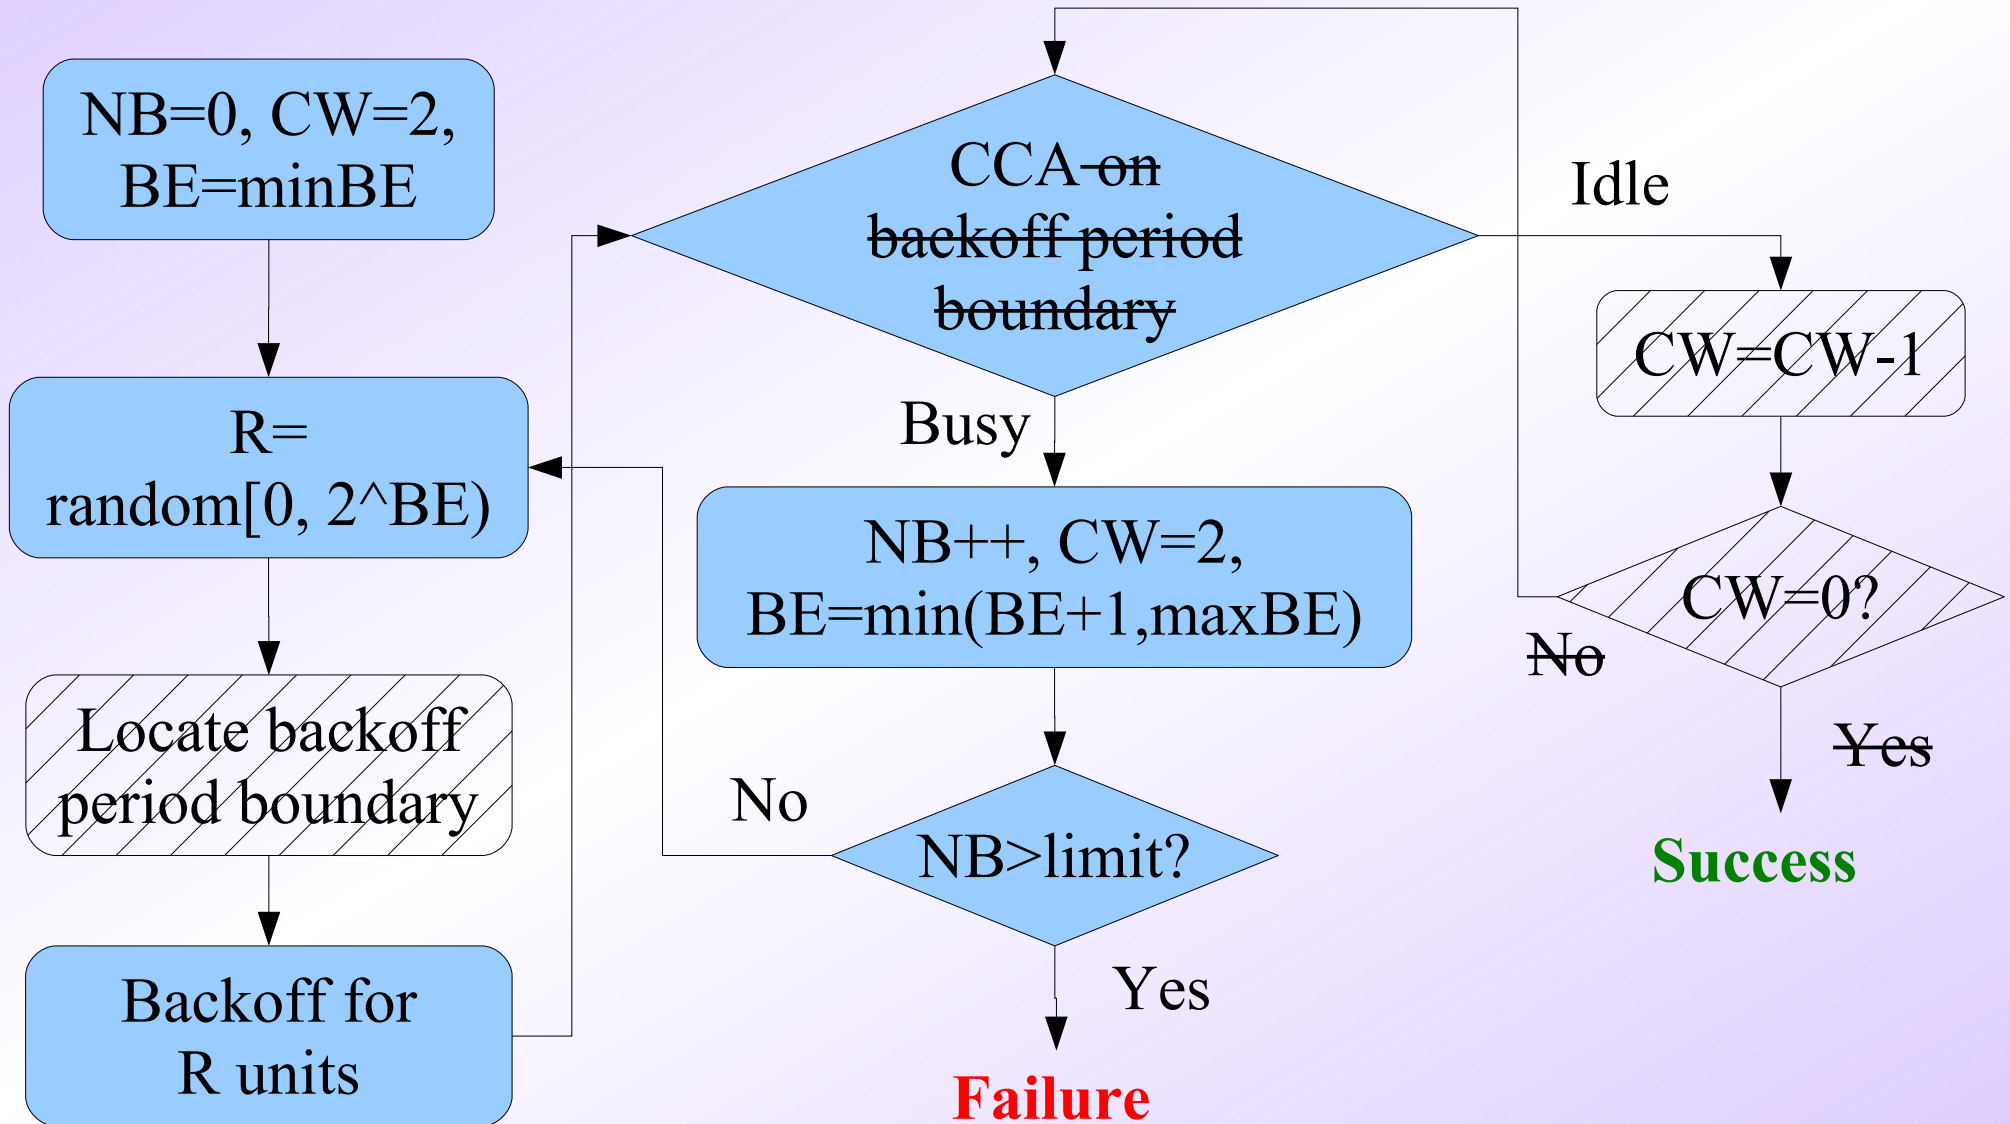

# Outline

- What is 802.15.4 ? Other related technologies
- 802.15.4 PHY overview
- Device classes, network topologies
- 802.15.4 MAC
- MAC management:
  - Starting and maintaining PANs
  - Association
- Data exchange mechanisms

# Scanning and PAN Creation

- Scanning procedures: active, passive
- **Active scan:**
  - Send beacon request
  - A beaoned PAN coordinator need not respond to the request (periodic beacon will suffice)
  - A non-beaoned PAN coordinator will respond with a beacon
- **Orphan scan:** orphan notification command sent by device to a coordinator
- A new PAN started only after an active scan
  - New PAN id is chosen (collision possible)


# PAN id Collision

- Detection by coordinator:
  - On receiving a beacon frame with same PAN id
  - On receiving a PAN id **collision notification**
- Detection by device:
  - On receiving conflicting information
- Resolution:
  - Coordinator will perform **active scan**
  - Select **new PAN id**
  - Broadcast **coordinator realignment** message

# Association

- An FFD or RFD can associate with an existing PAN
  - After active or passive scan
- Association request + ack
- Association response + ack

# Data Transmission to Coordinator (Beaconed PAN)

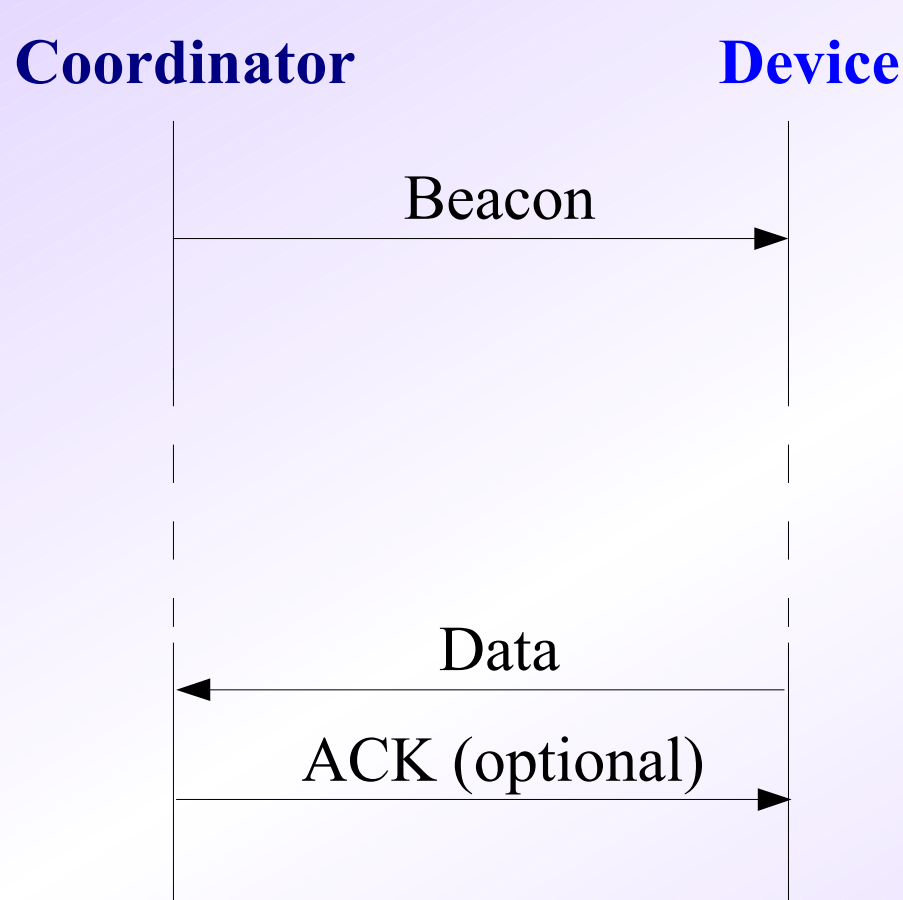


- Data uses slotted CSMA
- ACK does not use CSMA
  - Optional ACK
  - Requirement is indicated in the data packet

# Data Transmission to Coordinator (non-Beaconed PAN)

Coordinator

Device

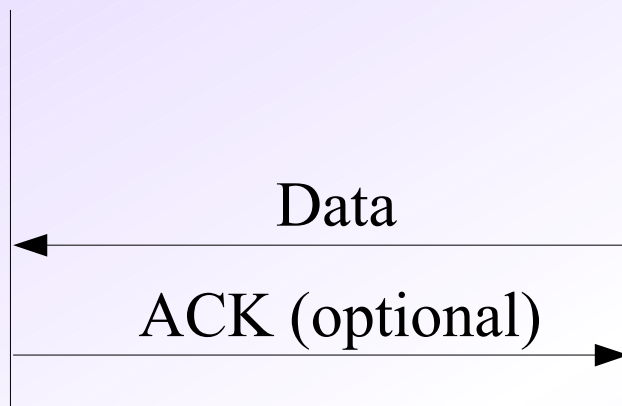


- Data uses unslotted CSMA
- ACK does not use CSMA
  - Optional ACK
  - Requirement is indicated in the data packet



# Data Transmission from Coordinator (Beaconed PAN)

Coordinator

Device

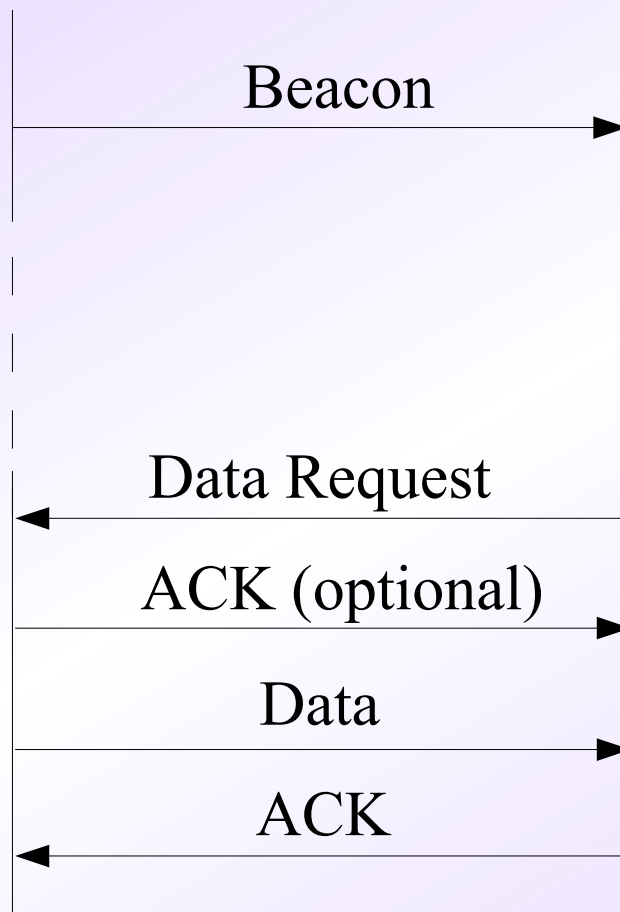


- Presence of downlink data is indicated in beacon
- Whenever device wakes up, it requests for data
- Data removed from coordinator queue on ACK

# Data Transmission from Coordinator (non-Beaconed PAN)

Coordinator

Device

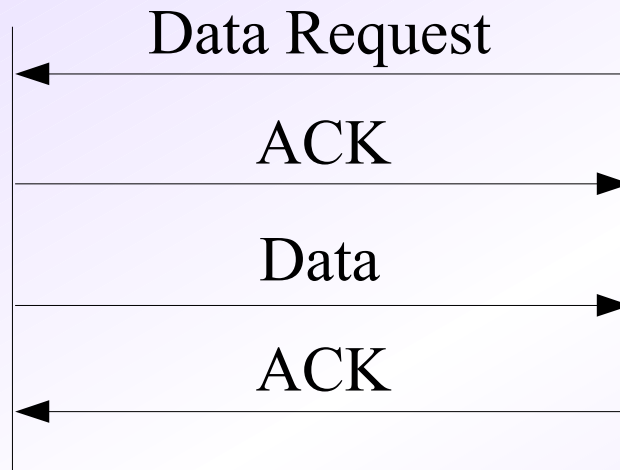

- No data pending at coordinator ==> send data of length zero

# Peer-to-peer Data Transfers

- Unslotted CSMA or using synchronization
  - Synchronization specification beyond the scope of 802.15.4

# Concept of Primitives

- A network layer provides a service which is used by a higher layer



# Summary

- 802.15.4: IEEE standard for embedded wireless (sensor) applications
  - PHY + MAC
  - MAC has CSMA/CA as well as GTS
  - Good support for low-power devices